


## For industrial use Industrial Hose

This series of hoses can be applied for piping of equipment at factories, installing with various machines (molding and printing machines), and various fluids such as cement fluids used for machine tools, drilling machines, and bridge construction works. Superior in flexibility, transparency, pressure resistance, negative pressure resistance, and oil resistance, this series of hoses are appropriate for industrial use.

### MEGA Sun Braid Hose

Renewed design with white lines. Rubber-like touch of highly elastic resin. The fluids can be visually checked easily.

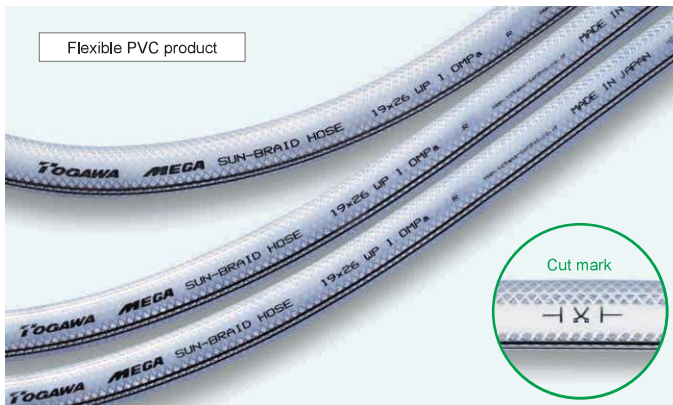

- Use** For water supply of machines and factories, air piping, and water supply for engineering, and construction sites.
- Features** Highly elastic resin is used. The fluids can be visually checked easily.
- Fluids** Water Oil Note: Cannot be used for fuel oil


Specifications: Working temperature limit: Between -5°C and +60°C

Nominal designation	Inner diameter (mm)	Outer diameter (mm)	Regular size (m)	Maximum working pressure (MPa at 20°C)	Minimum bending radius (mm)	Regular size weight (kg)
SB-4	4.0	9.0	100	1.5	16	7
SB-6	6.0	11.0	100	1.5	24	9
SB-8	8.0	13.5	100	1.4	32	12
SB-9	9.0	15.0	100	1.4	36	15
SB-10	10.0	16.0	100	1.1	40	16
SB-12	12.0	18.0	100	1.0	48	18
SB-15	15.0	22.0	100	1.0	60	26
SB-19	19.0	26.0	50	1.0	76	16
SB-22	22.0	29.0	50	1.0	88	18
SB-25	25.0	33.0	50	1.0	100	23
SB-32	32.0	41.0	50	0.7	128	33
SB-38	38.0	48.0	50	0.6	152	43
SB-50	50.0	62.0	40	0.6	200	55
SB-63	63.0	80.0	20	0.3	252	52
SB-75	75.0	92.0	20	0.3	300	60
SB-90	90.0	108.0	20	0.3	450	73.8
SB-100	100.0	118.0	20	0.3	500	77.8

\* The white lines are available only for the products in which inner diameter is between 12 and 75, and are not applied for the products in which inner diameter is between 6 and 10, 90 and 100.

### Super Tom Oil resistance Sun Braid Hose

Superior in oil resistance of the specialized resin used. Use this hose for color coding with the MEGA Sun Braid Hose.

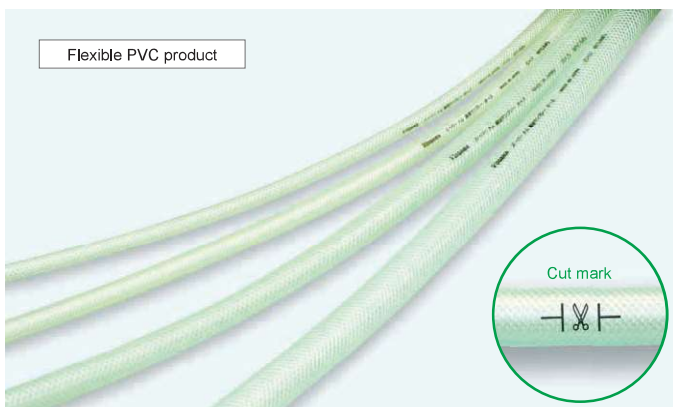

- Use** For water supply of machines and factories, air piping, and water supply for engineering, and construction sites.
- Features** Superior in oil resistance, which is appropriate for lubricating oil piping. Can be used for color coding with the MEGA Sun Braid Hose.
- Fluids** Water Oil Note: Cannot be used for fuel oil

Specifications: Working temperature limit: Between -5°C and +60°C

Nominal designation	Inner diameter (mm)	Outer diameter (mm)	Regular size (m)	Maximum working pressure (MPa at 20°C)	Minimum bending radius (mm)	Regular size weight (kg)
TB-6	6.0	10.5	100	1.1	24	8
TB-8	8.0	13.0	100	1.1	32	11
TB-9.5	9.5	15.0	100	1.1	38	15
TB-12	12.0	17.0	100	1.0	48	16
TB-15	15.0	21.0	50	0.8	60	11.5
TB-19	19.0	25.0	50	0.7	76	14.5
TB-25	25.0	32.0	50	0.6	100	22
TB-32	32.0	39.5	50	0.5	128	29
TB-38	38.0	46.5	50	0.4	152	38.5
TB-50	50.0	60.0	40	0.3	200	47

