

**NEW MODEL!**



**A versatile conductive air hose is now available!**




**Antistatic**

**UB-easy AIR HOSE**  
**MADE IN JAPAN**

Nominal designation	I.D. (mm)	O.D. (mm)	Regular Size (m)	Max. Working Pressure MPa at 20°C	Min Bending radius (mm)	Regular size weight (kg)
UB-6510	6.5	10.0	100	1.5	35	5.4
UB-8512	8.5	12.5	100	1.5	45	8.3

Working temperature limit: Between -5°C~ +60°C

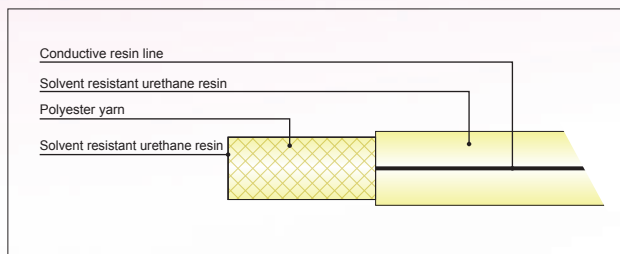

Applications	Features	Fruids
Conductive air hose for painting	Just tighten the metal fittings! No need to bare ground wire.	Air

●As a conductive sleeve is applied around the outer layer, the grounding can be completed just by tightening the metallic joint (when the resistance value is  $9 \times 10^6 \Omega$  or less, and the whole length is 15m or less).