

BORING

Portable Magnetic Base Drilling Machine

ATRA ACE manual feed

New generation magnetic base drilling machines help meet productivity and safety goals.

- Advanced safety system


Model WOJ-3200

- Max. 32 mm dia. x 50 mm deep



Model AO-5575

- Max. 55 mm dia. x 75 mm deep

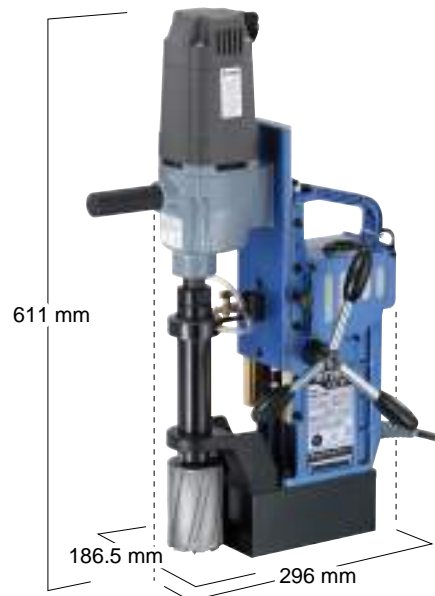

Specifications

Model		WOJ-3200				AO-5575											
Power Source (Single Phase)		110 - 120 V AC, 50/60 Hz		220 - 240 V AC, 50/60 Hz		110 - 120 V AC, 50/60 Hz		220 - 240 V AC, 50/60 Hz									
Electric Drill	Rated Power Consumption	W		950		1150											
	Rated Current	A		8.6		4.3		10.8		5.4							
	No-load Speed	min ⁻¹ (rpm)		870		350		650									
Magnet Power Consumption		W		38		30		50									
Hole Capacity mm	Cutter	Hole Diameter	Plate Thickness	Hole Diameter	Plate Thickness	Hole Diameter	Plate Thickness	Hole Diameter	Plate Thickness								
	One-touch Type JETBROACH 25L	12 to 17	9 to 25	12 to 17	9 to 25	12 to 17	9 to 25	12 to 17	9 to 25								
	One-touch Type JETBROACH 35L	17.5 to 32	9 to 35	17.5 to 32	9 to 35	17.5 to 40	9 to 35	17.5 to 40	9 to 35								
	One-touch Type JETBROACH 50L	12 to 32	9 to 50	12 to 32	9 to 50	12 to 55	9 to 50	12 to 55	9 to 50								
	One-touch Type JETBROACH 75L	-	-	-	-	17.5 to 55	9 to 75	17.5 to 55	9 to 75								
	One-touch Type HI-BROACH 25L	-	-	-	-	12 to 50	9 to 25	12 to 50	9 to 25								
	One-touch Type HI-BROACH 50L	-	-	-	-	12 to 50	9 to 50	12 to 50	9 to 50								
	Twist Drill	Max. 13 mm dia.				-											
Max. Stroke		mm		130		105											
Magnet Holding Power		N(kgf)		9000 (918)		10000 (1020)											
Magnet Dimensions		mm		99 x 177		86 x 170											
Power Cord Length		m		3		3											
Mass (Weight)		kg		13		18											
Accessories Included		<ul style="list-style-type: none">• Carry Case• Oil Tank Ass'y• Pilot Pin 08035• Sub Handle• 2 pieces of Hex. Socket Head Bolt 5 x 10 mm				<ul style="list-style-type: none">• 3 mm Hex. Socket Screw Key• 4 mm Hex. Socket Screw Key• 6 mm Hex. Socket Screw Key• 8 x 10 mm Spanner• Guard• Safety Strap				<ul style="list-style-type: none">• Carry Case• Cutting Oil 0.5L• Pilot Pin 08050• Side Handle• 3 mm Hex. Socket Screw Key				<ul style="list-style-type: none">• 5 mm Hex. Socket Screw Key• 8 x 10 mm Spanner• Guard• Chain			

Optional Accessories

Ref. No.	PN	Description	Sales Unit	Applicable Model	
				WOJ-3200	AO-5575
1	TB07691	Chip Breaker Ass'y	1 piece	●	●
2	TB07474	Chip Breaker Ass'y	1 piece	●	●
3	TQ10581	Jet Oiler No.3013	1 piece	●	●
4	TB01098	Tube 4 x 7 x 3000 Ass'y	1 piece	●	●
5	TB01507	Cutting Oil 2L	1 piece	●	●
6	TB07696	Pipe Attachment Ass'y	1 piece	●	●
7	TB04374	Supporting Magnet Ass'y	1 piece	●	●
8	TB07690	One-touch Drill Adapter	1 piece	●	●
9	TB02536	Sleeve 6.5 for Triangle Shank Drill Bit	1 piece	●	●
		One-touch Type JETBROACH 25L	1 piece	●	●
		One-touch Type JETBROACH 35L	1 piece	●	●
		One-touch Type JETBROACH 50L	1 piece	●	●
		One-touch Type JETBROACH 75L	1 piece	●	●
		One-touch Type HI-BROACH 25L	1 piece	●	●
		One-touch Type HI-BROACH 50L	1 piece	●	●

* 50L for stacked plates

