


**High transparency!**  
**Excellent flexibility!**  
**Smooth inner surface!**



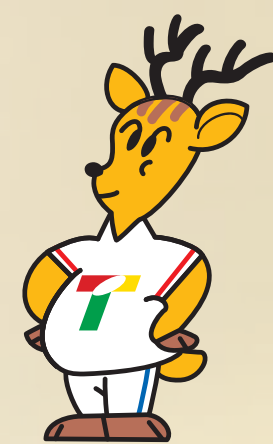


**TOGAWA**  
 INDUSTRY CORPORATION

**Super Sun Spring Hose**  
**MADE IN JAPAN**

**Easy to check fluid condition**

Specifications: Working temperature limit: Between -5°C and +60°C

Use
<ul style="list-style-type: none"> <li>Water supply for machines and factories</li> <li>Suction piping</li> <li>Building and civil engineering sites</li> </ul>
Features
<ul style="list-style-type: none"> <li>Flexible and hard to break</li> <li>Usable under negative pressure</li> </ul>
Fluids
 Water  Oil  Powders
Note: Cannot be used for fuel oil

Nominal designation	Inner diameter (mm)	Outer diameter (mm)	Regular size (m)	Maximum working pressure MPa at 20°C	Burst pressure MPa at 20°C	Minimum bending radius (mm)	Weight (kg/m)	Regular size weight (kg)
SP-6	6.0	11.0	100	0.9	6.5	30	0.100	10
SP-8	8.0	13.5	100	0.9	5.5	40	0.140	14
SP-9	9.0	15.0	100	0.8	5.0	45	0.160	16
SP-12	12.0	18.0	100	0.7	4.5	60	0.230	23
SP-15	15.0	22.0	100	0.6	3.5	75	0.320	32
SP-19	19.0	26.0	50	0.5	3.0	95	0.440	22
SP-25	25.0	33.0	50	0.5	2.5	125	0.540	27
SP-32	32.0	41.0	40	0.4	2.0	160	0.775	31
SP-38	38.0	48.0	40	0.4	1.9	190	0.975	39
SP-50	50.0	62.0	40	0.3	1.3	250	1.475	59
SP-63	63.0	80.0	20	0.3	0.9	315	2.700	54
SP-75	75.0	92.0	20	0.3	0.9	375	3.150	63
SP-90	90.0	108.0	20	0.3	0.9	450	3.810	76.2
SP-100	100.0	115.0	20	0.3	0.9	500	4.200	84