



NAKATOMI

Japan



NAKATOMI

MOVIN SPOT COOLER

Moving Spot Air Conditioner for Industrial Cooling in Factories, Car Workshops, Stores etc..



SAC-1800 (TL)
Single Duct

N407-TC (TL)
Single Duct

SAC - 4500 (TL)
Twin Duct

SAC-6500 (TL)
Triple Duct

- Refrigerant R407C/R410A
- Operating temperature limit 64°~113°F (18°~ 45°C)
- Dehumidification
- Portable
- Overload relay
- No Assembly required
- Single Phase 220 V



Auto - Swing Function



Stretch up to 450mm

Heat exhaust duct




Flexible duct



Control panel cover



Compact drain tank

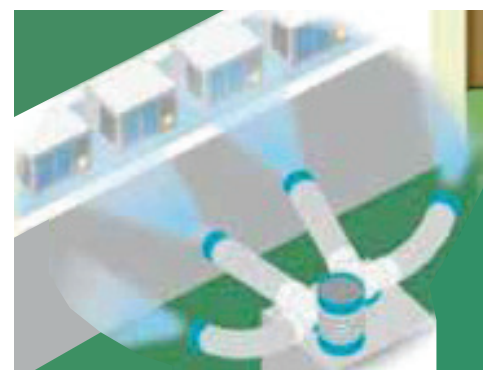

Data of Cool Air Temperature

Model	Operating Temperature	30°C	35°C	40°C	45°C
SAC - 1800(TL)		19°C	23°C	27°C	31°C
N407-TC (TL)		17°C	21°C	25°C	30°C
SAC - 4500(TL)		19°C	23°C	27°C	32°C
SAC-6500(TL)		18°C	22°C	26°C	31°C

Specifications

Model No.		SAC - 1800(TL)	N407-TC (TL)	SAC - 4500(TL)	SAC-6500(TL)
Cooling Capacity	kw	1.8	2.5	4.5	6.5
	Tons	0.5	0.7	1.3	1.8
Water storage capacity	Ltrs	3	5	9	25
Size	mm	W475 X D265 X H610	W400 X D430 X H820	W520 X D470 X H1100	W560 X D620 X H1270
Weight	Kg	23	40	73	99
Power Consumption	W	618	High: 1097 Low: 979	High: 1922 Low: 1837	High: 2525 Low: 2424
Effective Area	Sq Ft	77	107	190	280
Power cord length	Ft	6.3	6.3	7	10