

No. GT-H12K/H30/H120K/HS30 Air Scissors

- Two types of blades, standard and micro-edge, are available.



GT-H12K Small lightweight type with one fixed blade (Made-to-order)




GT-H120K With one fixed blade



GT-H30 Round-Type Double movable blades



GT-HS30 Square-Type Double movable blades









Serrated micro edge

Model No.	Capacity (max) (mm)	Air Consumption (cm ³ /str.)	Applied Pressure (MPa)	Overall Length (with Blade) (mm)	Weight (with Blade) (g)	EDP No.
GT-H30	Kevlar t=1	584	0.3	280	1,030	360211
GT-H12K	Kevlar t=0.3	116	0.2	186.2	290	360201
GT-H120K	Band steel 15×0.5t	116	0.5~0.6	211	340	360202
GT-HS30	Kevlar t=1	584	0.3	260	970	360212

·Hose coupling: R1/4 (Body Rc1/8) ·Air hose inner dia.: 5mm ·Overall length/Weight: Accessories not included.
 ·Total length and weight of the GT-HS30 and HS30 are given with the H30ME blade mounted.



Blades specifications

Model No.	Applicable Nippers	Blade Shape	Blade Aperture (mm)	Effective Blade Cutting Length (mm)	Weight (g)	EDP No.
H30ME	H30, HS30	Scissors type	26	50	280	360311
H30MEL	H30, HS30	Serrated micro edge	34	67	285	360312
H12ME30K	H12K	Scissors type	17	28	56	360301
H120SK	H120K	Scissors type	15	38	115	360302

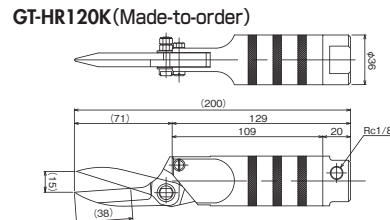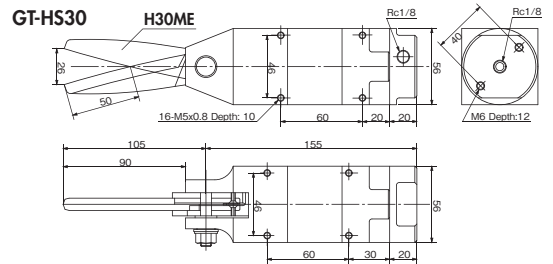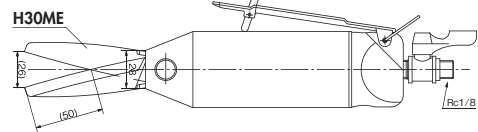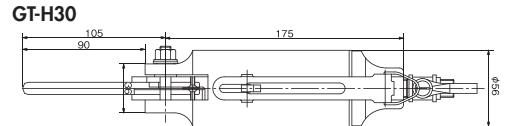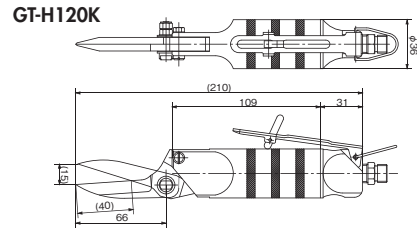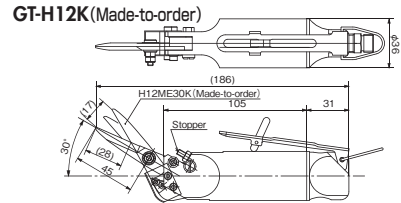

No. GT-HWR1/10 GT-HWS1/10 Double Action Air Scissors

- Blade opening and closing is driven by air piston.
- Having no spring mechanism in the main unit facilitates maintenance.

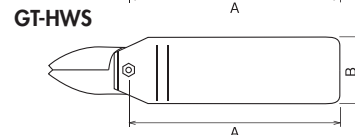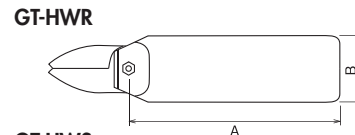

Applicable Blade Specifications

Model No.	Blade Opening (mm)	Cutting blade effective (mm)	A (mm)	Weight (g)	EDP No.
For GT-HWR1/HWS1					
HW1J	3.0	17	25	16	360452
For GT-HWS10					
HW10J	5.0	28	40	76	360462



Model No.	Capacity φ (mm)	Air Consumption (cm ³ /str.)	Applied Pressure (N)	Air Pressure (MPa)	A (mm)	B (mm)	Weight (g)	EDP No.	
Double Action Air Scissors (Round Type without Lever)									
GT-HWR1	1.0	0.5	45	294	0.4~0.5	95	20	84	360701
GT-HWR10	1.8	1.2	116	588	0.4~0.5	146	36	295	360714

Model No.	Capacity φ (mm)	Air Consumption (cm ³ /str.)	Applied Pressure (N)	Air Pressure (MPa)	A (mm)	B (mm)	Weight (g)	EDP No.	
Double Action Air Scissors (Square Type)									
GT-HWS1	1.0	0.5	45	294	0.4~0.5	95	23×20	116	360700
GT-HWS10	1.8	1.2	116	588	0.4~0.5	146	36	356	360713

※Blades are optional.